






Diwa Sliding Automatic Door

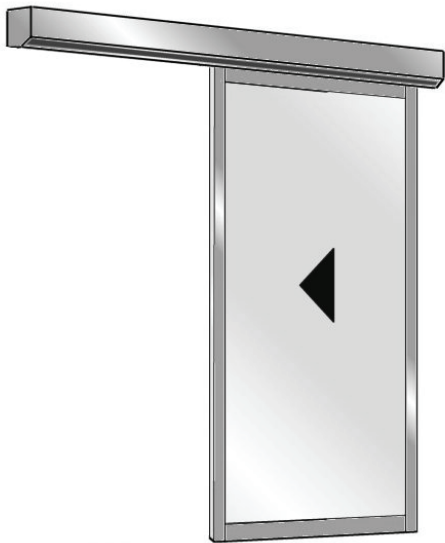


1-leaf sliding door

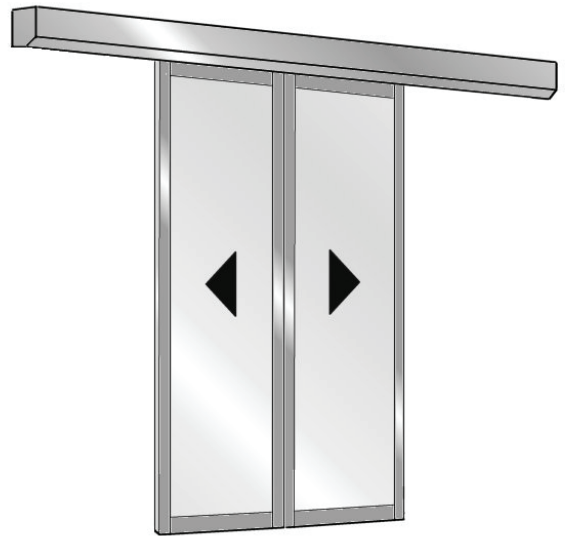

2-leaf sliding door

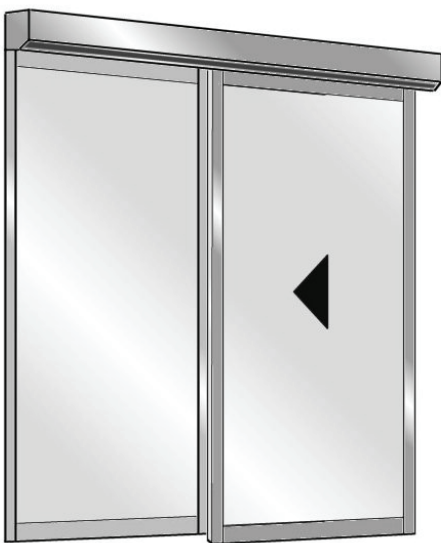

1-leaf sliding leaf with fixed leaf

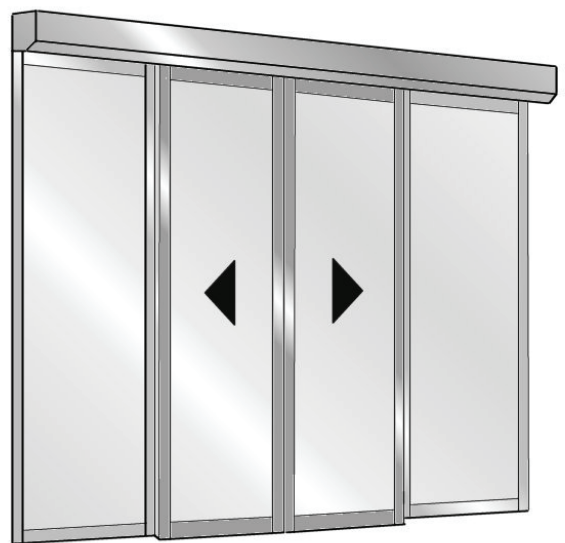


2-leaf sliding door with fixed leaves




Diwa Sliding Automatic Door



Standard casing

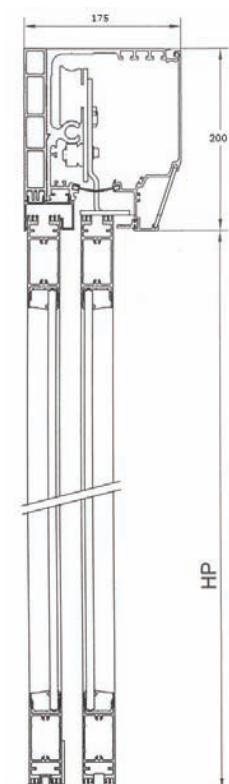

Reinforced casing

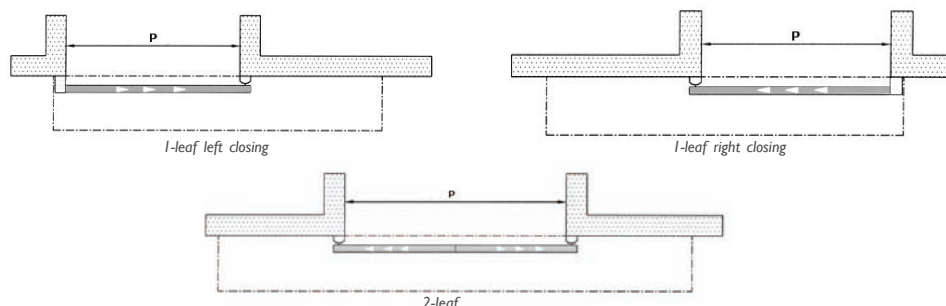

Technical Features

Installation

Surface applied on existing structure
Between walls or Against posts

Opening width (P)

1 leaf min. 750 mm / max. 1 500 mm
2 leaves min. 900 mm / max. 2400 mm

Opening Height (HP)

max. 2 500 mm

Leaf weight

1 leaf 1 x 150 kg
2 leaves 2 x 100 kg

Structure / Glazing

Mounting with seals Aluminium profiles G25 (25 x 35 mm) Glazing 8 and 10 mm
G38 (38 x 60 mm) Glazing 8/10 and 26 mm
LUMINA Securit 10 mm

Casing

Self supporting without strengthening profile up to 4 ml
Standard Dim. : 150 x 200 mm
Dim. with strengthening profile : 175 x 200 mm

Finish

Raw, RAL lacquering, Anodised (ASI)

Adjustable speed / leaf

Opening 10 to 100 cm/s
Closing 10 to 60 cm/s

Adjustable open force

Opening 6 to 25 daN
Closing 6 to 15 daN

Hold open time

Time lag 1 to 15 s

Electrical connections

Power supply 230V, 50/60 Hz
Power consumption Max / Average 500 w / 40 W

