





## DIVA LC Sliding Automatic door




*1-leaf sliding door*

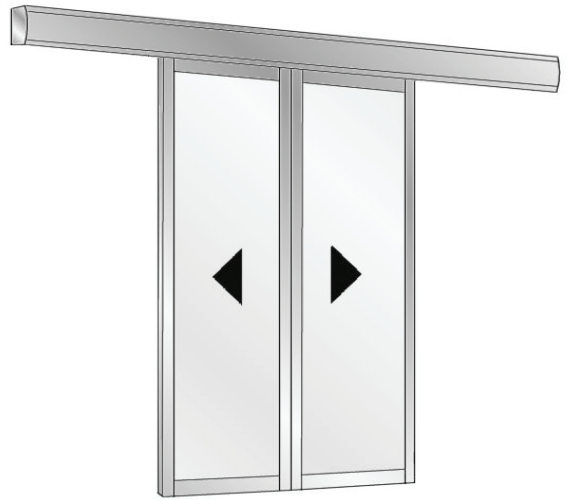

*2-leaf sliding door*

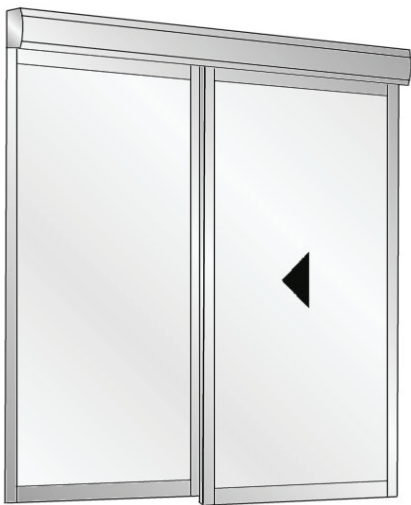



*1-leaf sliding door with fixed leaf*

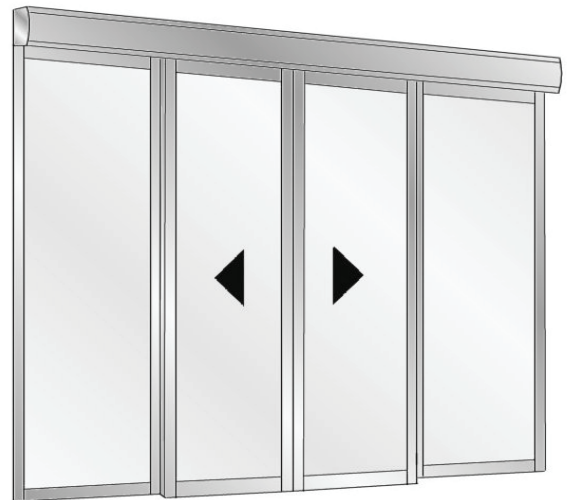


*2-leaf sliding door with fixed leaves*



# DIVA LC Sliding Automatic door

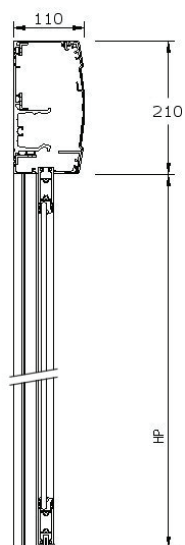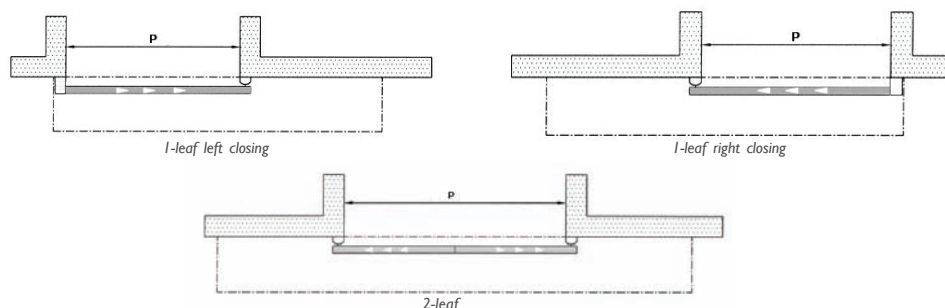

Standard casing

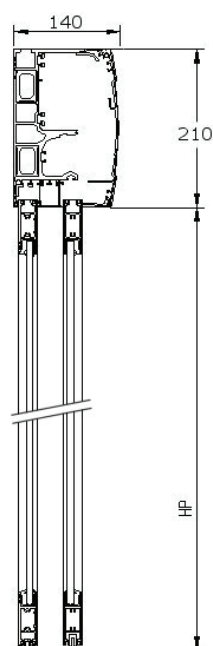

Reinforced casing

## Technical Features

### Installation

Surface applied on existing structure  
Between walls or Against posts

### Opening width (P)

1 leaf	min. 800 mm / max. 1500 mm
2 leaves	min. 800 mm / max. 2 400 mm

### Opening Height (HP)

max. 2 500 mm

### Leaf weight

1 leaf	max. 1 x 110 kg
2 leaves	max. 2 x 85 kg

### Structure / Glazing

Mounting with seals	Aluminium profiles G25 (25 x 35 mm)	Glazing 8 and 10 mm
	G38 (38 x 60 mm)	Glazing 8/10 and 26 mm
	LUMINA	Securit 10 mm

### Casing

Self supporting without strengthening profile up to 5 ml	
Standard Dim	110 x 210 mm
Dim. with strengthening profile	140 x 210 mm

### Finish

Raw, RAL lacquering, Anodised (AS1)

### Adjustable speed / leaf

Opening	40 to 99 cm/s
Closing	10 to 50 cm/s

### Adjustable open force

Opening	3,3 to 20 daN
Closing	3,3 to 15 daN

### Hold open time

Time lag 1 to 15 s

### Electrical connections

Power supply	230V, 50/60 Hz
Power consumption Max / Average	165 w / 40 w



Comply with European directives  
EN 60335-1 Electrical Safety  
EN 50 081-1/2 ECM  
CO48 conformity Safety Emergency Doors  
(French standard)

