






## *Diva* Curved Automatic Door




*Curved DIVA door*

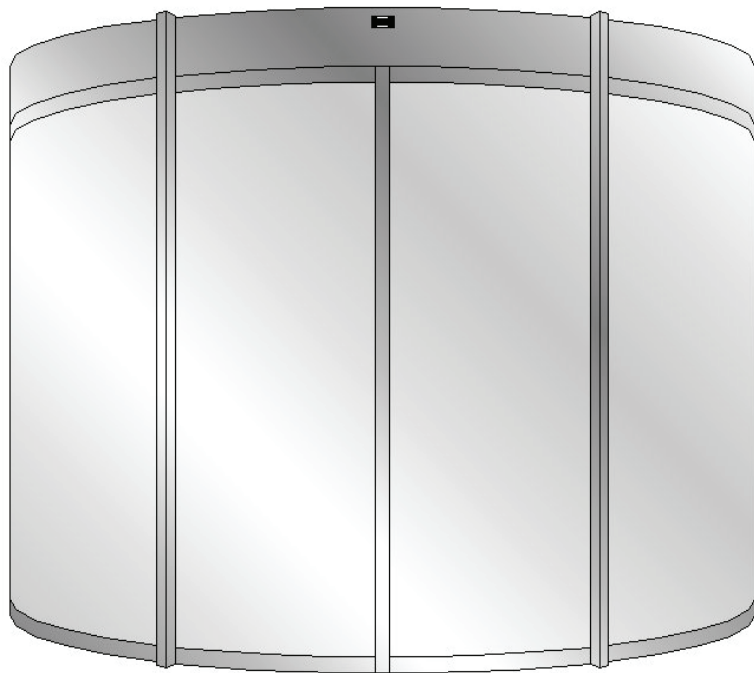

# Divia Curved Automatic Door

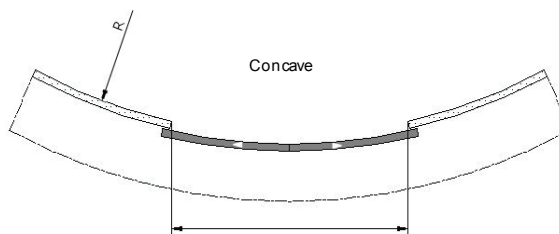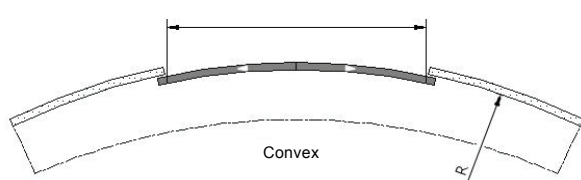

## Technical Features

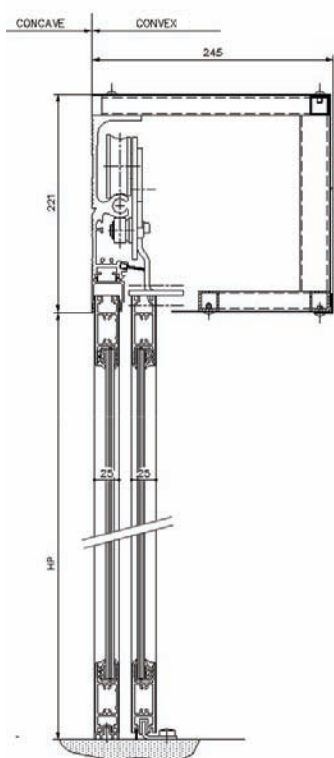

|                                |   |  |
|--------------------------------|---|--|
| <b>Installation</b>            | Surface applied on existing structure or Between walls  |  |
| <b>Configuration</b>           | Concave or Convex                                       |  |
| <b>Diameter</b>                | min. 3 000 mm (R. 1500 mm)                              |  |
| <b>Passage width (P)</b>       | max. 2 400 mm   |  |
| <b>Passage height (HP)</b>     | max. 2 500 mm   |  |
| <b>Leaves weight</b>           | 1 leaf  | 1 x 150 kg                                 |
|                                | 2 leaves  | 2 x 100 kg                                 |
| <b>Structure / Glazing</b>     | Aluminium profiles G25 (25 x 35 mm) Glazing 8 and 10 mm |  |
| <b>Casing</b>                  | 245 x 221 mm  |  |
| <b>Finishing</b>               | Natural satin, RAL lacquering or colour anodised        |  |
| <b>Adjustable speed / leaf</b> | Opening   | 10 to 100 cm/s (Recommended 40 to 60 cm/s) |
|                                | Closing   | 10 to 60 cm/s                              |
| <b>Adjustable open force</b>   | Opening   | 6 to 25 daN                                |
|                                | Closing   | 6 to 15 daN                                |
| <b>Hold open time</b>          | Time lag  | 1 to 15 s                                  |
| <b>Electrical connections</b>  | Power supply  | 230V, 50/60 Hz                             |
|                                | Power consumption Max / Average                         | 500 w / 40 W                               |

