






Divia Telescopic Automatic Door

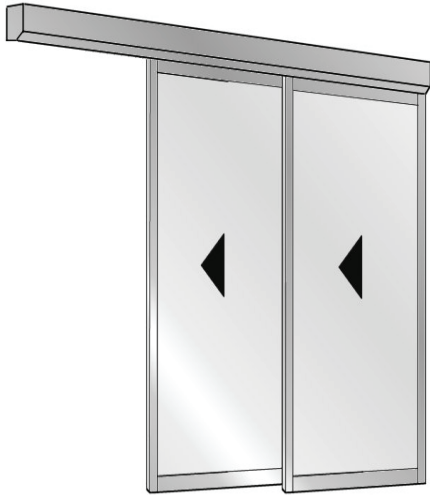


2-leaf Telescopic door

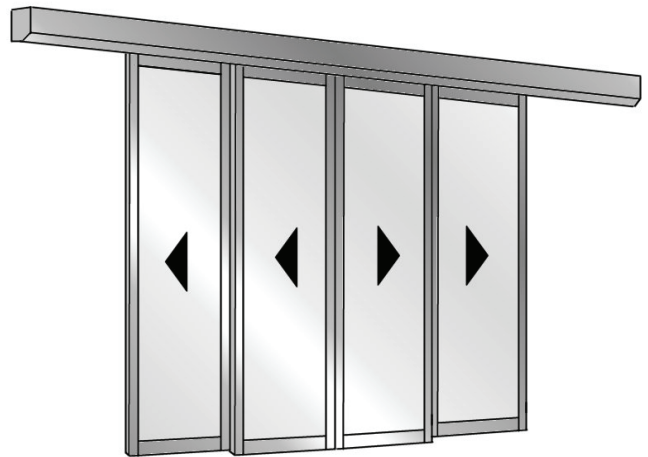

4-leaf Telescopic door

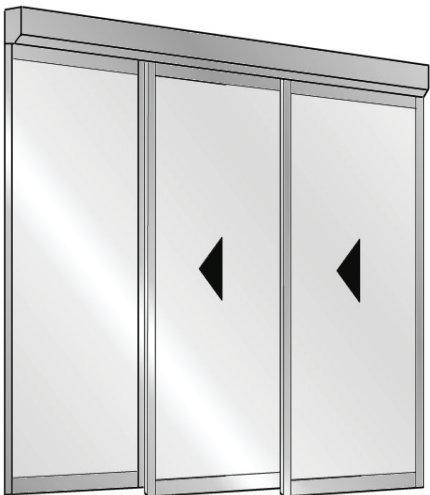



2-leaf telescopic door with fixed leaf

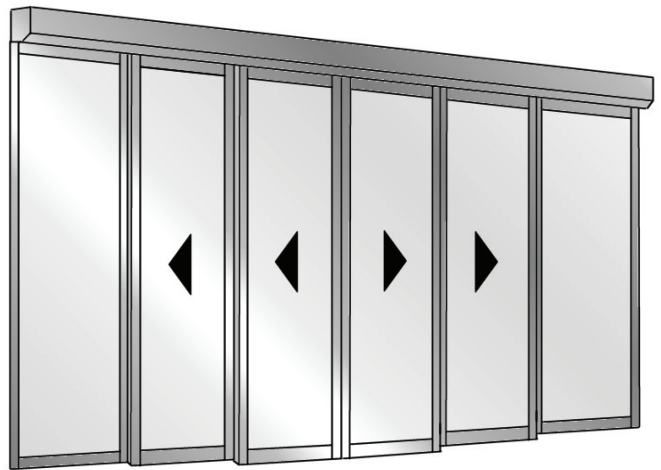


4-leaf Telescopic door with fixed leaves



Diwa Telescopic Automatic Door

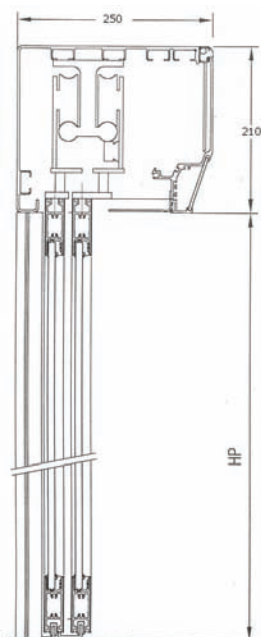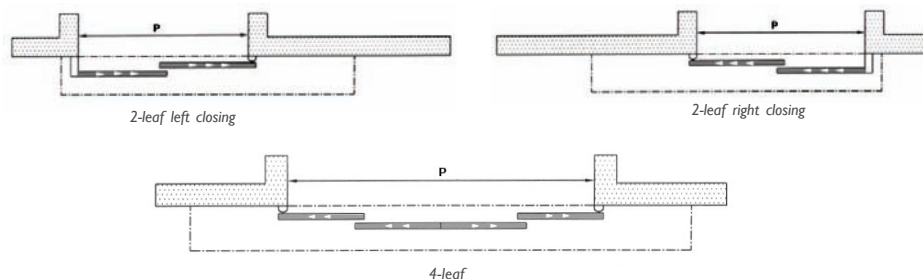

Standard casing

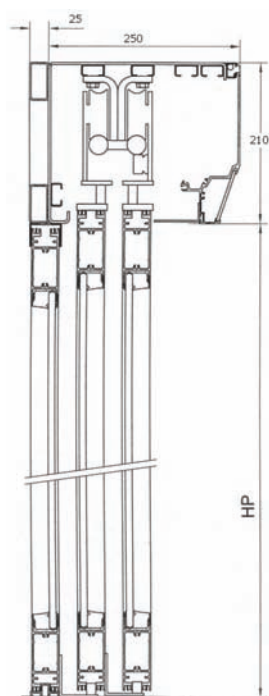

Reinforced casing

Technical Features

Installation

Surface applied on existing structure
Between walls or Against posts

Opening width (P)

2 leaves min. 1 050 mm / max. 1 800 mm
4 leaves min. 1 380 mm / max. 2400 mm

Opening Height (HP)

max. 2 500 mm

Leaf weight

2 leaves max. 2 x 100 kg
4 leaves max. 4 x 70 kg

Structure / Glazing

Mounting with seals

Aluminium profiles G25 (25 x 35 mm) Glazing 8 and 10 mm
G38 (38 x 60 mm) Glazing 8/10 and 26 mm

Casing

Self supporting without strengthening profile up to 3 ml
Standard Dim. : 250 x 210 mm
Dim. with strengthening profile : 275 x 210 mm

Finish

Raw, RAL lacquering, Anodised (AS1)

Adjustable speed / leaf

Opening 10 to 100 cm/s
Closing 10 to 60 cm/s

Adjustable open force

Opening 6 to 25 daN
Closing 6 to 15 daN

Hold open time

Time lag 1 to 15 s

Electrical connections

Power supply 230V, 50/60 Hz
Power consumption Max / Average 500 w / 40 W



Comply with European directives
EN 60335-1 Electrical Safety
EN 50 081-1/2 ECM
CO48 conformity Safety Emergency Doors
(French standard)

